
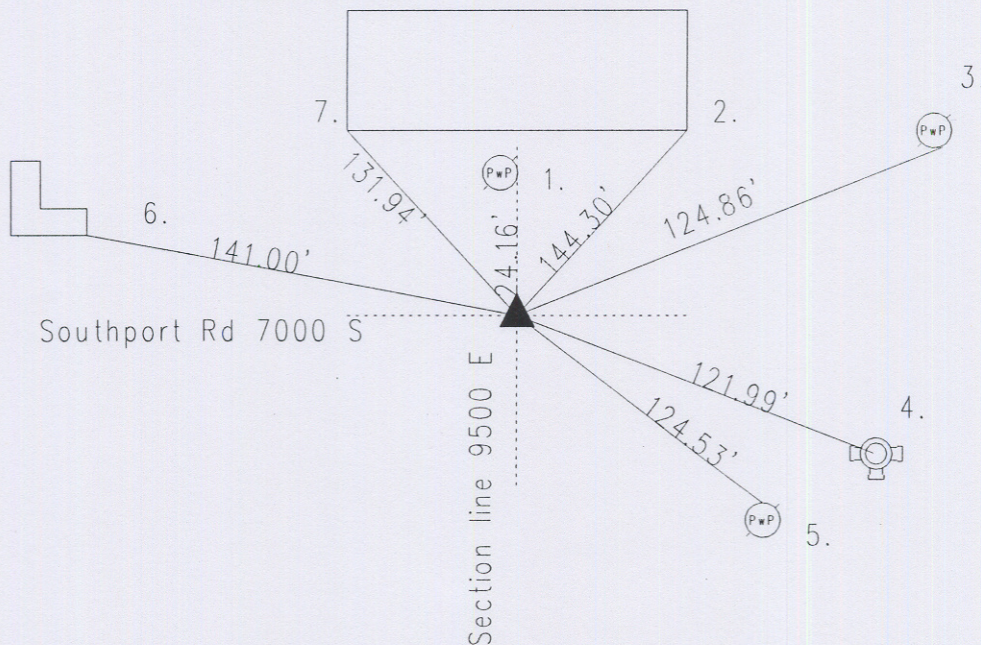


OFFICE OF THE MARION COUNTY SURVEYOR.  
SECTION RECORD CORNER  
SECTION 17 TOWNSHIP 14 RANGE 5  
DATE: 1-19-07  
PARTY CHIEF: Wilcoxen  
CREW: \_\_\_\_\_  
TYPE OF MARKER: Harrison  
METHOD OF ESTABLISHMENT: County: 2-25-02

IN. S.P.C. E ZONE NAD '83  
NAME: 14051702  
N: 490611.8304(m)  
E: 71432.6883(m)

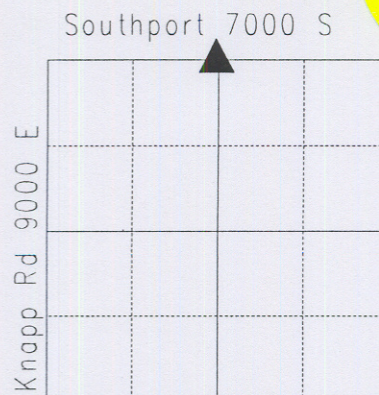

Original post set 1820 by Hendricks with witness: 16" beech N 30 E 10 links; 4" dogwood S 20 E 29 links per Marion County Atlas pg. 13. smith 5-23-1877 called no monument nor witness recorded. Monroe 12-3-55 called stone. Monroe 11-25-59 called same. Schmidt 9-28-61 called same. Wilcoxen 9-8-77 called steel pin 8" down. Wilcoxen 2-7-80 called same. Jacobs 8-1-87 called iron pin at surface. Wilcoxen 10-30-90 excavated and 24" long iron pin fd at surface. Found 13" long iron pin 12" down with steel fence post beside stone 18" down. Iron pin was .15'E and .10'N of stone. Harrison set. Re-tied 7-7-97. Re-tied 2-25-02. Re-tied 1-19-07 by Wilcoxen.

14051702

REF.	DISTANCE	DESCRIPTION
1.	24.16'	Due N to road nail F PwP#22-771A 10"up
2.	144.30'	SF corner of brick address 9520
3.	124.86'	PK nail S PwP#142-771BA 12"up
4.	121.99'	Top nut of fire hydrant
5.	124.53'	PK nail N PwP#141-771B 12"up
6.	141.00'	SF corner of brick wall
7.	131.94'	SW corner of Address 9520.